

# Canon



## WORKGROUP SOLUTIONS



 **imageRUNNER®**  
2022 / 2018

## THE ULTIMATE IN WORKGROUP PRODUCTIVITY

The Canon imageRUNNER 2022/2018 models deliver enhanced productivity to help low-volume environments run smarter—combining the smart multifunction capabilities that your business needs today, while growing with you into the future through expandable functionality.

Producing crisp 1200 x 1200 dpi output at speeds of up to 22 and 18 pages per minute (letter), respectively, these compact yet powerful systems deliver the benefits of digital copying, network printing, color network TWAIN scanning, and optional fax features. Plus, flexible paper handling and finishing options can help you save time, space and, most of all, document production costs.

### SPECIFICATIONS

Type:	Digital Multifunction Imaging System
Imaging System:	Laser Dry Electrostatic Transfer
Developing System:	Dry Single-Component Projection
Fixing System:	RAPID Fusing System
Image Server Memory (Std./Max.):	128MB/256MB RAM
First-Copy-Out Time:	6.9 Seconds from Platen Glass
Warm-Up Time:	One Second or Less from Sleep Mode* 14 Seconds or Less from Main Power Off*
Copy Speed/Print Speed	
2022:	Up to 22 ppm (Letter)
2018:	Up to 18 ppm (Letter)
Maximum Original Size:	11" x 17"
Maximum Copy Size:	11" x 17"
Minimum Copy Size:	3-3/4" x 5/7-8"
Acceptable Originals:	Sheets, Books, and 3-Dimensional Items (Up to 4-3/8 lb.)
Multiple Copies:	1 to 99
Maximum Copy Reservation:	Five jobs
Scan Resolution:	Up to 600 x 600 dpi
Copy Resolution (Enhanced):	Up to 1200 x 600 dpi
Print Resolution:	Up to 1200 x 1200 dpi**
Halftone:	256 Levels
Automatic Trayless Duplexing:	Standard
Magnification:	20% to 200% (In 1% Increments)
Preset Reduction:	50%, 64%, 73%, 78%
Preset Enlargement:	121%, 129%, 200%
Exposure Control:	Automatic or Manual (9 Levels)

Standard Paper Capacity	
2022:	2 x 250 + 80 Bypass (Total 580 Sheets)
2018:	1 x 250 + 80 Bypass (Total 330 Sheets)
Maximum Paper Capacity:	4 x 250 + 80 Bypass (Total 1,080 Sheets)
Acceptable Paper Weight:	17 lb. to 24 lb. Bond (Cassette) 17 lb. to 32 lb. Bond (Bypass)

Dimensions (H x W x D)	
2022:	29-3/4" x 24-1/2" x 26-5/8"
2018:	26-1/2" x 24-1/2" x 26-5/8"

Weight	
2022:	116 lb.
2018:	103 lb.
Power Requirements:	120V AC, 60Hz, 4.6A
Power Consumption:	1.425kW (Max.)
Toner Yield:	8,300 at 6% Coverage

#### Print Specifications


CPU:	Canon Customer Processor—Shared
Memory:	Shared with Main Unit—256MB Std. 128MB RAM (Std.) 256MB RAM (Opt.)†
PDL Support:	UFR II LT, PCL 5e/6 (Std.) UFR II LT (Std.) PCL 5e/6 (Opt.)†
Standard Interfaces:	10/100Base-TX (RJ-45) Hi-Speed USB 2.0
Multiple Copies:	1 to 999
Network Operating Systems:	Novell® NetWare® v. 5.1, 6, 6.5 Windows® 98/Me/2000/XP/Windows Server 2003/Windows Vista® Apple® Macintosh® OS X or Higher

Printer Drivers	
UFR II LT:	Windows 98/Me/2000/XP Windows Server 2003 Windows Vista Citrix MetaFrame Macintosh OS X (OS 10.2.8 or Later)
PCL 5e/6:	Windows 98/Me/2000/XP/Windows Server 2003/Windows Vista Citrix MetaFrame

#### OPTIONAL ACCESSORIES

##### Duplexing Automatic Document Feeder-P2

Paper Capacity:	50 Sheets (Letter, Letter-R, Statement)
Acceptable Original Size:	Statement to 11" x 17"
Acceptable Paper Weights:	10 lb. to 32 lb. Bond (One Sheet) 14 lb. to 28 lb. Bond (Multiple Sheets)
Document Scanning Speed:	20 Sheets/Minute (Letter, B/W)
Dimensions (H x W x D):	4-7/8" x 22-1/4" x 19-1/4"

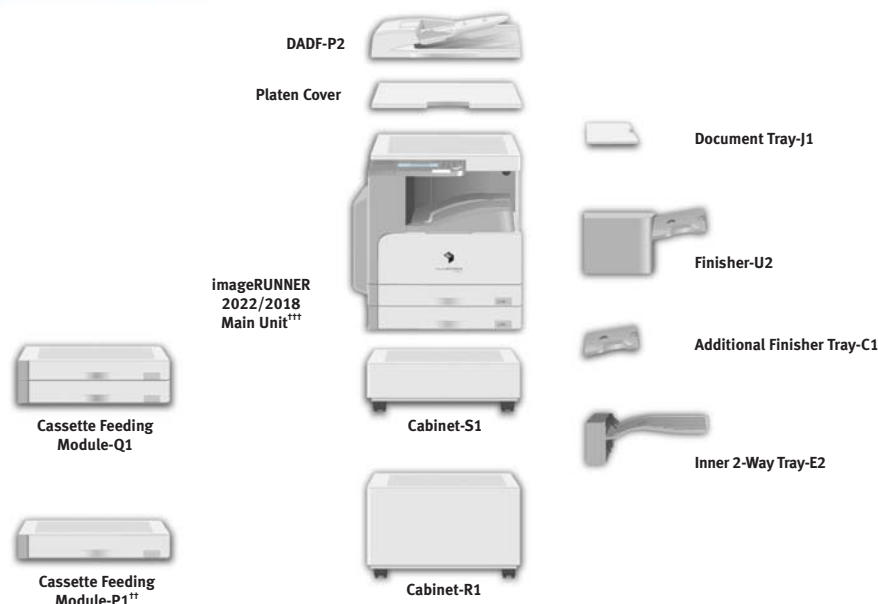

#### Cassette Feeding Module-Q1

Paper Capacity:	2 x 250-Sheet Cassette
Acceptable Paper Size:	11 x 17", Legal, Letter Letter-R, Statement
Acceptable Paper Weight:	17 lb. to 24 lb. Bond
Dimensions (H x W x D):	8" x 22-7/8" x 22-3/8"
Weight:	Approx. 26.5 lb.

#### Cassette Feeding Module-P1 (Optional for 2018 only)

Paper Capacity:	1 x 250-Sheet Cassette
Acceptable Paper Size:	11" x 17" Legal, Letter, Letter-R, Statement
Acceptable Paper Weight:	17 lb. to 24 lb. Bond
Dimensions (H x W x D):	4-5/8" x 22-7/8" x 22-3/8"
Weight:	Approx. 13 lb.

#### Inner 2-Way Tray-E2

Number of Trays:	Two
Acceptable Paper Size:	Statement to 11" x 17"
Tray Capacity	
Upper Output Tray:	100 Sheets (Letter) 50 Sheets (Other Sizes)
Lower Output Tray:	250 Sheets (Letter) 100 Sheets (Other Sizes)
Dimensions (H x W x D) (Inside Main Unit):	6" x 19-1/8" x 17-3/4" (151.2mm x 485.5mm x 451mm)
Weight:	Approx. 33 lb.

#### Finisher-U2

Number of Trays:	One (Second Tray Optional)
Tray Capacity	
Single Tray:	770 Sheets (Letter, Statement-R) 380 Sheets (Legal, Letter-R, 11" x 17")

#### With Additional Finisher Tray-C1:

200 Sheets Each Tray (Letter, Statement-R) 150 Sheets Each Tray (Legal, Letter-R, 11" x 17")
---

#### Staple Position/Size

Top Left Corner:	11" x 17" (Landscape), Legal (Landscape), Letter, Letter-R
Top Right Corner:	11" x 17" (Portrait), Legal (Portrait)
Max. Stapling Capacity:	Up to 30 Sheets (All Sizes)
Dimensions (H x W x D) (Inside Main Unit):	11-7/8" x 18-7/8" x 20-1/2"
Weight:	Approx. 22 lb.
Attachable Accessories:	Optional Additional Finisher Tray-C1

#### Additional Finisher Tray-C1 (Optional for Finisher-U2)

Tray Capacity:	200 Sheets (Letter, Statement-R) 150 Sheets (Legal, Letter-R, 11" x 17")
Dimensions (H x W x D) (Inside Main Unit):	3-2/5" x 8-1/10" x 15-3/8"
Weight:	Approx. 4 lb.

#### Super G3 Fax Board-AA1

Applicable Line:	Public Switched Telephone Network (PSTN) Facsimile Network
Connection Lines:	One
Address Book:	500 Destinations
Sending Original Sizes:	Statement to 11" x 17"
Recording Printing Sizes:	Statement to 11" x 17"
Transmission Time***	
ECM-MMR:	Approx. 3.2 Seconds/Page (33.6 Kbps)
GRMR Method:	Approx. 13 Seconds/Page (33.6 Kbps)
GRMH Method:	Approx. 13 Seconds/Page (33.6 Kbps)
JBIG:	Approx. 2.6 Seconds/Page (33.6 Kbps)

#### Scan Line Density

Standard:	8 Pels/mm x 3.85 Lines/mm
Fine:	8 Pels/mm x 7.7 Lines/mm
Super Fine:	8 Pels/mm x 15.4 Lines/mm
Ultra Fine:	16 Pels/mm x 15.4 Lines/mm
Image Memory:	Approx. 1,000 Pages

#### Additional Supplies and Accessories

Duplex Unit-B1  
Fax Panel-B1  
PCL Printer Kit-VI  
Platen Cover Type-J  
Basic Card Set  
Braille Label Lit-A1  
Cabinet-R1 (Large)  
Cabinet-S1 (Small)  
Card Reader Attachment-D1  
Card Reader-E1  
Copy Card Sets  
Document Tray-J1  
Power Supply Kit-Q1  
Barcode Printing Kit-B1  
FL Cassette-AF1  
Stamp Ink Cartridge-C1  
Staple Cartridge-J1  
GPR-18 Black Toner

\* At room temperature of 20°C/68°F.  
\*\* UFR II LT only.

\*\*\* Approximately 3-second-per-page fax transmission time based on ITU-T No. 1 Chart (JBIG, Standard Mode) at 33.6 Kbps modem speed when transmitting to another v.34 machine. The Public Switched Telephone Network (PSTN) currently supports 28.8 Kbps modem speeds or lower, depending on telephone line conditions.

† Available with PCL Printer Kit-VI

\*\* Option for imageRUNNER 2018 only.

\*\*\* Standard configuration of the imageRUNNER 2022i device shown; the imageRUNNER 2018i device ships standard with one paper cassette.

**Canon**  
*image*ANYWARE

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that these products meet the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. Novell and NetWare are registered trademarks of Novell, Inc. in the United States and other countries. Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries. Apple and Macintosh are trademarks of Apple Computer, Inc. CANON, IMAGERUNNER, and the SUPER G3 and the GENUINE logos are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All referenced product names and other marks are trademarks of their respective owners. Specifications and availability subject to change without notice. ©2007 Canon U.S.A., Inc. All rights reserved.

1-800-OK-CANON  
[www.usa.canon.com](http://www.usa.canon.com)

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

